




Mini-Brute[®] 250 Automated Label Applicator

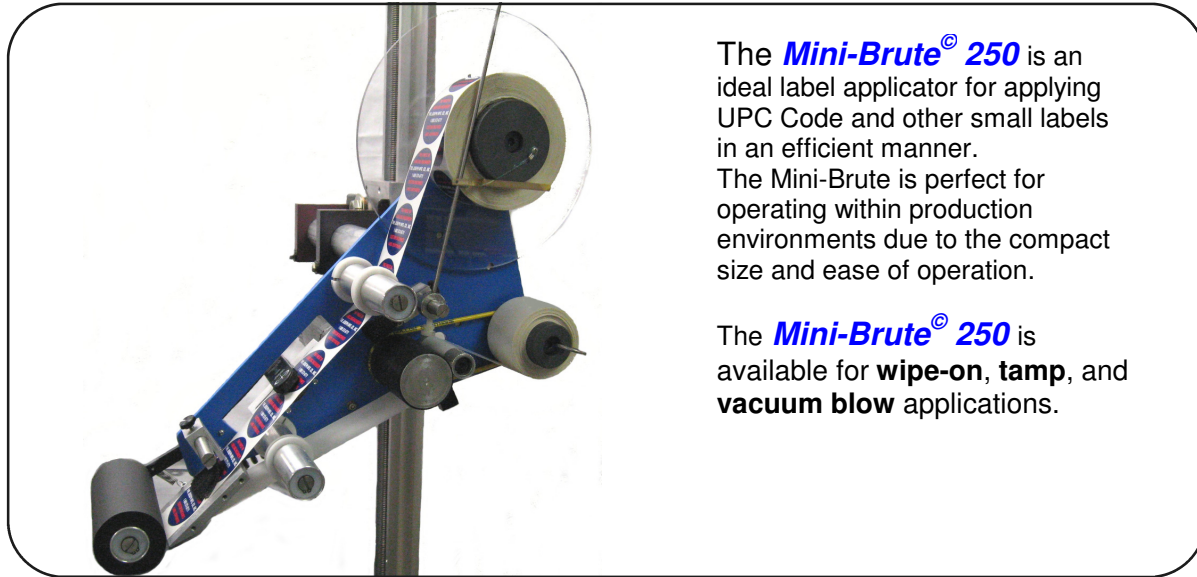

The **Mini-Brute[®] 250** is an ideal label applicator for applying UPC Code and other small labels in an efficient manner.

The Mini-Brute is perfect for operating within production environments due to the compact size and ease of operation.

The **Mini-Brute[®] 250** is available for **wipe-on**, **tamp**, and **vacuum blow** applications.

Specifications :

- Aluminum construction with stainless steel fasteners
- Controls and solid state circuitry contained within a moisture and dust resistant enclosure
- Designed for continuous operation up to 100 labels/min (based on label size)
- Variable Speed Motor
- Standard Placement Accuracy: $\pm .125$ "
- Operating temperature range; 40° F to 125° F (4.4 ° C to 51.6 ° C)
- Available in right or left hand configuration
- User friendly electronic controls
- Retro reflective product sensor

Label Specifications:

- Standard label widths: 1/2" – 2 1/2"
- Core size: 3" I.D.
- 10" O.D. Supply Roll
- Die-cut, edge trimmed and waste removed with minimum 3/32" gap
- Opaque label

Options:

- Clear label sensor
- Hot stamp imprinter
- Low label detection system
- T-Base Stand with locking casters
- 10 user selected presets for frequent labeling jobs